I (2) DATA SHEET



Manual Call Point Replacer for NS-ACP

Part no. 5101066-00A

System: Salwico CS3000*, CS4000 and NSAC-I

Spare glasses (10pcs.)

General Description

NS-ACP is a Manual call point for the addressable fire alarm systems Salwico CS4000, NSAC-1 and CS3000 with SPK2000.

The selected material PC/ABS and the encapsulation, with ingress protection IP24D,

Pressing the glass causing it to crack activates the fire alarm. The call point can also be tested with a special key, included in the delivery.

A red LED on the front of the call point indicates the fire alarm. The LED remains lit until the glass has been replaced and the fire alarm has been reset on the control panel.

The address of the call point is set with a DIP-switch.

The NS-ACP is polarity independent which simplifies the installation. The apparatus has low risk of mechanical danger.

Data


28 VDC Nominal voltage Working voltage 15-36 **VDC** Supervising current 0.2 mA 2.5 mA Alarm current IP24D Ingress protection Temperature range -25°C to +70°C Ambient humidity 0 to 95% RH PC/ABS Material Color Red, RAL 300 I Weight ~165 g Ø6-12 Cable dimension

Part No: 5200075_00A


mm

*CS3000 with SPK2000

Connection



Test




The specifications described herein are subject to change without notice.

Data sheet no. 5101066-00A_Replacer_for_NS-ACP_M_EN



2(2) DATA SHEET

Change Glass

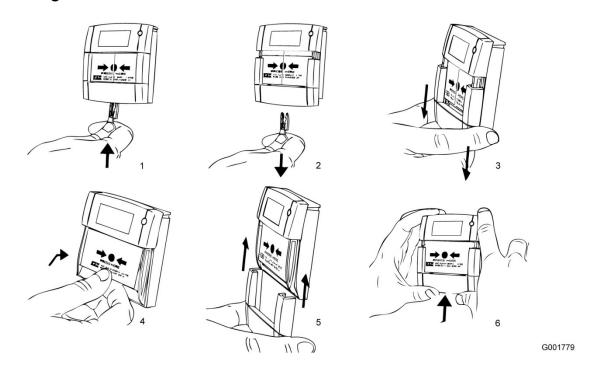

Dimensions (mm)

