

DMP 343

Industrial Pressure Transmitter

Without Media Isolation

accuracy according to IEC 60770:
0.35 % FSO



Nominal pressure

from 0 ... 10 mbar up to 0 ... 1000 mbar

Product characteristics

- ▶ excellent linearity
- ▶ small thermal effect
- ▶ excellent long term stability



Optional versions

- ▶ IS-version:
Ex ia = intrinsically safe for gases and dusts
- ▶ different electrical and mechanical connections
- ▶ customer specific versions

The pressure transmitter DMP 343 has been especially designed for the measurement of very low gauge pressure and for vacuum applications. Permissible media are non-aggressive, dry gases and non-aggressive, low viscos oils.

The DMP 343 features excellent thermal behaviour and outstanding long term stability. A variety of standard output signals as well as mechanical and electrical connections make the DMP 343 covering a wide field of applications.

Preferred areas of use are

-  Plant and machine engineering
-  Heating and air conditioning



DMP 343

Industrial Pressure Transmitter

Technical Data

Input pressure range														
Nominal pressure gauge	[mbar]	-1000 ... 0	10	16	25	40	60	100	160	250	400	600	1000	
Overpressure	[bar]	3	0.2	0.2	0.2	0.5	0.5	1	2	3	3	3	3	
Permissible vacuum	[bar]	-1	-0.2			-0.5			-1					
Burst pressure	[bar]	5	0.3	0.3	0.3	0.75	0.75	1.5	3	5	5	5	5	
Output signal / Supply														
Standard	2-wire: 4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$													
Option IS-version	2-wire: 4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$													
Options 3-wire	3-wire: 0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$ 0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$													
Performance														
Accuracy ¹	standard: $\leq \pm 0.35 \% \text{ FSO}$ nominal pressure $\leq 100 \text{ mbar}$: $\leq \pm 0.50 \% \text{ FSO}$													
Permissible load	current 2-wire: $R_{\max} = [(V_S - V_{S\min}) / 0.02 \text{ A}] \Omega$ current 3-wire: $R_{\max} = 240 \Omega$ voltage 3-wire: $R_{\min} = 10 \text{ k}\Omega$													
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k Ω													
Response time	2-wire: $\leq 10 \text{ msec}$ 3-wire: $\leq 3 \text{ msec}$													
Long term stability	$\leq \pm 0.3 \% \text{ FSO} / \text{year}$ at reference conditions, for $p_N < 100 \text{ mbar}$ $\leq \pm 0.1 \% \text{ FSO} / \text{year}$ at reference conditions, for $p_N \geq 100 \text{ mbar}$													
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)														
Thermal effects (Offset and Span)														
Nominal pressure p_N	[mbar]	-1000 ... 0	≤ 100				≤ 400				> 400			
Tolerance band	[% FSO]	$\leq \pm 0.75$	$\leq \pm 1.5$				$\leq \pm 1$				$\leq \pm 0.75$			
in compensated range	[°C]	-20 ... 85	0 ... 50				0 ... 70				-20 ... 85			
Permissible temperatures														
Permissible temperatures	medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C													
Electrical protection														
Short-circuit protection	permanent													
Reverse polarity protection	no damage, but also no function													
Electromagnetic compatibility	emission and immunity according to EN 61326													
Mechanical stability														
Vibration	10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6													
Shock	500 g / 1 msec according to DIN EN 60068-2-27													
Materials														
Pressure port	stainless steel 1.4404 (316L)													
Housing	stainless steel 1.4404 (316L)													
Option compact field housing	stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)													
Seals	FKM													
Sensor	stainless steel 1.4404 (316L), silicon, epoxy or RTV, mineral glass													
Media wetted parts	pressure port, seals, sensor													
Explosion protection (only for 4 ... 20 mA / 2-wire)														
Approvals DX19-DMP 343	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da													
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \text{ }\mu\text{H}$, the supply connections have an inner capacity of max. 27 nF opposite the housing													
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C													
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$													
Miscellaneous														
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA													
Weight	approx. 140 g													
Installation position	any													
Operational life	100 million load cycles													
CE-conformity	EMC Directive: 2014/30/EU													
ATEX Directive	2014/34/EU													

DMP 343

Industrial Pressure Transmitter

Technical Data

Wiring diagrams

2-wire-system (current)

3-wire-system (current / voltage)

Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	compact field housing	cable colours (IEC 60757)
Supply +	1	3	1	IN +	WH (white)
Supply -	2	4	2	IN -	BN (brown)
Signal + (only for 3-wire)	3	1	3	OUT+	GN (green)
Shield	ground pin	5	4		GYNE (green-yellow)

Electrical connections (dimensions in mm)

standard

ISO 4400 (IP 65)

options

Binder Series 723, 5-pin (IP 67)

M12x1, 4-pin (IP 67)

compact field housing (IP 67)

cable outlet with PVC cable (IP 67)²


cable outlet, cable with ventilation tube (IP 68)³

⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

² standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)
³ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connection (dimensions in mm)

standard

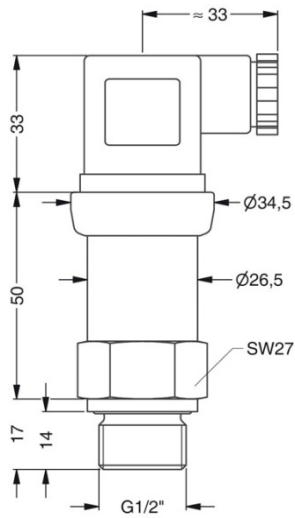


G1/2" DIN 3852
with ISO 4400


options




G1/2" EN 837




G1/4" DIN 3852




G1/4" EN 837

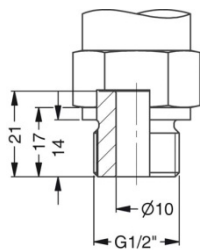

G1/2" open port



1/2" NPT



1/4" NPT

⇒ metric threads and others on request

© 2020 BD|SENSORS GmbH — The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 343

DMP 343

Pressure													
	gauge	1	0	0									
Input													
	[mbar]												
	10	0	1	0	0								
	16	0	1	6	0								
	25	0	2	5	0								
	40	0	4	0	0								
	60	0	6	0	0								
	100	1	0	0	0								
	160	1	6	0	0								
	250	2	5	0	0								
	400	4	0	0	0								
	600	6	0	0	0								
	1000	1	0	0	1								
	-1000 ... 0	X	1	0	2								
	customer	9	9	9	9								
Output													
	4 ... 20 mA / 2-wire					1							
	0 ... 20 mA / 3-wire					2							
	0 ... 10 V / 3-wire					3							
	intrinsic safety 4 ... 20 mA / 2-wire					E							
	customer					9							
												consult	
Accuracy													
	standard for $p_N > 100$ mbar:	0.35	%	FSO									
	standard for $p_N \leq 100$ mbar:	0.5	%	FSO									
						3							
						5							
Electrical connection													
	male and female plug ISO 4400					1	0	0					
	male plug Binder series 723 (5-pin)					2	0	0					
	cable outlet with PVC cable (IP67) ¹					T	A	0					
	cable outlet,												
	cable with ventilation tube (IP68) ²					T	R	0					
	male plug M12x1 (4-pin) / metal					M	1	0					
	compact field housing					8	5	0					
	stainless steel 1.4301 (304)					9	9	9					
	customer					9	9	9					
												consult	
Mechanical connection													
	G1/2" DIN 3852					1	0	0					
	G1/2" EN 837					2	0	0					
	G1/4" DIN 3852					3	0	0					
	G1/4" EN 837					4	0	0					
	G1/2" DIN 3852 open pressure port					H	0	0					
	1/2" NPT					N	0	0					
	1/4" NPT					N	4	0					
	customer ³					9	9	9					
												consult	
Seals													
	FKM								1				
	customer								9				
												consult	
Special version													
	standard								0	0	0		
	customer								9	9	9		
												consult	

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); others on request

² code TR0 = PVC cable, cable with ventilation tube available in different types and lengths

³ metric threads and others on request

© 2020 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.