




- 75: 1 distance to spot size
- Dual laser pointers
- 150ms faster sampling time
- 1% accuracy
- Reading memory



Adjustable Emissivity      Data Record      Fast measuring with high accuracy

- Features**
- Graphic white and black LCD display
  - Max, Min, DIF, AVG record & trigger lock
  - High / low alarm
  - Auto Power Off
  - Adjustable emissivity
  - Type K input
  - Memory data with Date/Time stamp (30 points)
  - USB interface
  - Datalog (Only 8879/8889H)
  - Wireless interface (Only 8879/8889H)

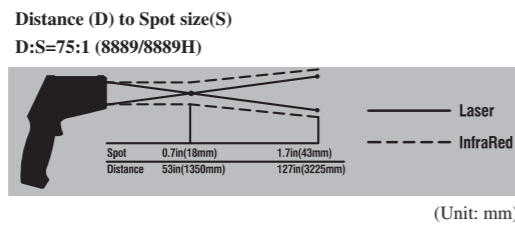

Model 8889/8889H



Thermistor clamp



TCP-100



Temperature probe  
(Optional: NR-31B / TP-500 / TCP-100)

Specifications	8878	8879	8889	8889H
IR Temp. Range	-50°C to 1200°C/ -58°F to 2192°F	-50°C to 1600°C/ -58°F to 2912°F	-50°C to 1850°C/ -58°F to 3362°F	-50°C to 2200°C/ -58°F to 3992°F
Response Time	Less than 150ms	Less than 150ms	Less than 150ms	Less than 150ms
Resolution	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°
Basic Accuracy (IR)	±1.0% of reading	±1.0% of reading	±1.0% of reading	±1.0% of reading
Optical Resolution	50:1 Distance to Spot size	50:1 Distance to Spot size	75:1 Distance to Spot size	75:1 Distance to Spot size
Emissivity	Adjustable 0.10~1.0	Adjustable 0.10~1.0	Adjustable 0.10~1.0	Adjustable 0.10~1.0
Type K Temp. Range	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F
Basic Accuracy (TK)	±0.5% of reading	±0.5% of reading	±0.5% of reading	±0.5% of reading
Readings memories	30	30	30	30
Datalog		*		*
Wireless interface(433Mhz)		*		*
Bluetooth interface				*

Size(HxWxD): 204mm x 155mm x 52mm  
Weight: 320g

Accessories:  
9V battery, USB Cable, Tripod, Software, Type-K temperature probe, Carrying case and Gift box




8867H/8868/8868H/8869/8869H Series provide much faster, easy and accurate readings for most surface temperature measurements with Dual laser pointers.

Two laser points converge to a single spot when the unit is at the optimal distance from the object being measured.

- 150ms faster sampling time with 1% accuracy
- High 50 to 1 distance to target ratio measures smaller surface areas at greater distances
- Widest temperature range
- Unique flat surface, modern housing design
- Built-in dual laser pointers for accurate targeting
- Automatic Data Hold & Trigger Lock
- Max, Min, DIF, AVG record
- High and low alarm
- Emissivity Digitally adjustable from 0.10 to 1.0
- USB interface
- Compatible with all standard connector Type K thermocouples

- Features**
- User selectable °C or °F
  - Dual Laser targeting
  - Automatic Data Hold
  - Auto Power Off
  - White Backlit LCD Display
  - Overrange indication
  - High Temperature
  - Max, Min, DIF, AVG record
  - High / low alarm, Trigger lock
  - Adjustable emissivity
  - Reading memory (8868/8869/8868H/8869H)
  - Type K input
  - USB interface

Distance (D) to Spot size(S)  
D:S=50:1(8869)

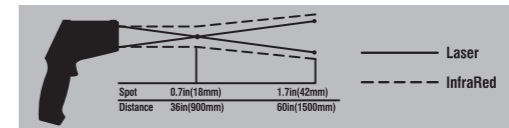

Model 8869



- 150ms faster sampling time
- 1% accuracy
- Reading memory

- 50 : 1 distance to spot size
- Dual laser pointers



EMC  
EN: 61326  
EN: 60825-1



Specifications	8867H	8868	8869	8868H	8869H
IR Temp. Range	-50°C to 1650°C/ -58°F to 3002°F	-50°C to 1200°C/ -58°F to 2192°F	-50°C to 1600°C/ -58°F to 2912°F	-50°C to 1850°C/ -58°F to 3362°F	-50°C to 2200°C/ -58°F to 3992°F
Response Time	Less than 150ms	Less than 150ms	Less than 150ms	Less than 150ms	Less than 150ms
Resolution	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°	0.1° up 1000°, 1° over 1000°
Basic Accuracy (IR)	±1.0% of reading	±1.0% of reading	±1.0% of reading	±1.0% of reading	±1.0% of reading
Optical Resolution	30:1 Distance to Spot size	50:1 Distance to Spot size	50:1 Distance to Spot size	50:1 Distance to Spot size	50:1 Distance to Spot size
Emissivity	Adjustable 0.10~1.0	Adjustable 0.10~1.0	Adjustable 0.10~1.0	Adjustable 0.10~1.0	Adjustable 0.10~1.0
Type K Temp. Range	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F	-50°C to 1370°C/ -58°F to 2498°F
Basic Accuracy (TK)	±1.5% of reading	±1.5% of reading	±1.5% of reading	±1.5% of reading	±1.5% of reading
Readings memories		99	99	99	99

Size(HxWxD): 204mm x 155mm x 52mm  
Weight: 320g

Accessories:  
9V battery, USB Cable, Tripod, Software, Type-K temperature probe, Carrying case and Gift box