


# Single-phase switching power supply 120-230 Vac output power 240 W

- Single-phase input 120 and 230 Vac
- Short circuit, overload, over temperature, input and output overvoltage protections
- High outrush current to guarantee downstream overcurrent protections selectivity and to start-up heavy loads
- Failure contact for Uout -10%
- Compact dimensions
- Suitable for applications in SELV and PELV circuits

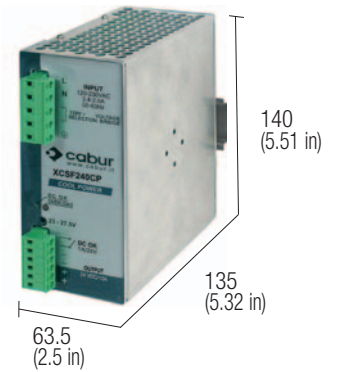


## NOTES

The depth dimension includes the terminal blocks and the DIN clamp.

- (2) Double input selectable with external jumper, DC supply allow only between 300 and 345 Vdc
- (3) Over 45°C (113°F) apply a derating: -0.17 A/°C for version C, CP and CPH; -0.27 A/°C for version B; -0.08 A/°C for version DP;
- (4) For this peak current, the output voltage does not drop more than 10% of the nominal value, but the current value, provided by the power supply also depends on the total line resistance.
- (5) Only on version CSF240CP, for orders, adds the letter H to the code (XCSF240CPH)

## BLOCK DIAGRAM

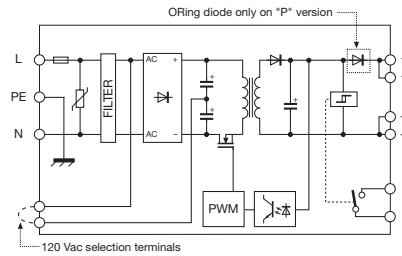

Special version for DC motors

VERSIONS	Cod. XCSF240C	Cod. XCSF240CP	Cod. XCSF240B	XCSF240DP
Output 24 Vdc 10 A	CSF240C			
Output 24 Vdc 10 A redundant version		CSF240CP		
Output 12...15 Vdc 16 A			CSF240B	
Output 48 Vdc 5 A redundant version				CSF240DP
INPUT TECHNICAL DATA	120 - 230 Vac (range 90...132 Vac / 185...264 Vac / 300...345 Vdc) (2)			
Input rated voltage	47...63 Hz			
Frequency	3.5 A / 1.8 A ± 10%			
Current @ nominal Iout (Uin 120 / 230 Vac)	< 35 A			
Current @ nominal Iout (Uin 120 / 230 Vac)	> 0.6			
Power factor	T 6.3 A replaceable			
Internal protection fuse	circuit breaker: 10 A - C characteristic - fuse: T 10 A			
External protection on AC line	OUTPUT TECHNICAL DATA			
OUTPUT TECHNICAL DATA	24 Vdc	12...15 Vdc	12...15 Vdc	48 Vdc
Output rated voltage	23...27.5 Vdc	12...15 Vdc	12...15 Vdc	45...55 Vdc
Output adjustable range	10 A @ 45°C (3)	16 A @ 45°C (3)	16 A @ 45°C (3)	5 A @ 45°C (3)
Continuous current	15 A for >30 s	24 A for >30 s	24 A for >30 s	7.5 A for >30 s
Overload limit	with Uout >90% Un (4)	with Uout >90% Un (4)	with Uout >90% Un (4)	with Uout >90% Un (4)
Short circuit peak current	>25 A for 400 ms (4)	>25 A for 400 ms (4)	>25 A for 400 ms (4)	>25 A for 400 ms (4)
Load regulation	< 1%	< 1%	< 1%	< 1%
Ripple @ nominal ratings	≤ 50 mVpp	≤ 50 mVpp	≤ 50 mVpp	≤ 50 mVpp
Hold up time @ In (Uin 120 / 230 Vac)	>30 ms / >60 ms	>30 ms / >60 ms	>30 ms / >60 ms	>30 ms / >60 ms
Overload / short circuit protections	hiccup at the overload limit with auto reset / over temperature protection			
Status display	"DC OK" green LED / "DC OK" alarm contact/ "Overload" red LED			
Alarm contact threshold	21.6 Vdc	10.8 Vdc	10.8 Vdc	43.2 Vdc
Parallel connection	possible	possible	possible	possible
Redundant parallel connection	possible with external ORing diode	factory provided with internal ORing diode	possible with external ORing diode	factory provided with internal ORing diode
GENERAL TECHNICAL DATA	>88% / >90%	>85% / >85%	>85% / >85%	>89% / >89%
Efficiency (Uin 120 / 230 Vac)	32 W / 27 W	42 W / 42 W	42 W / 42 W	28 W / 28 W
Dissipated power (Uin 120 / 230 Vac)	-20...+60°C, with derating over 45°C / over temperature protection (3)			
Operating temperature range	3 kVac / 60 s SELV output			
Input/output isolation	1.5 kVac / 60 s			
Input/ground isolation	0.5 kVac / 60 s			
Output/ground isolation	EN50178, EN61558, EN60950, IEC950, UL508, UL60950			
Standard/approvals	EN61000-6-2, EN61000-6-4, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11			
EMC Standards	>500'000 h acc. to SN 29500 / >150'000 h acc. to MIL Std. HDBK 217F			
MTBF @ 25°C @ nominal ratings	II / 3			
Overvoltage category/Pollution degree	IP 20 IEC 529, EN60529			
Protection degree	2.5 mm² pluggable screw type			
Connection terminal	aluminium			
Housing material	920 g (32.48 oz)			
Approx. weight	vertical on rail, allow 10 mm spacing between adjacent components			
Mounting information	MOUNTING ACCESSORIES			
MOUNTING ACCESSORIES	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB			
Mounting rail type according to IEC60715/TH35-7.5	—			
Mounting rail type according to IEC60715/G32	—			