



MICRO SWITCH™
Premium Miniature Basic Switches
V7 Series

MICRO SWITCH™ V7 Series

Premium Miniature Basic Switches

Honeywell's MICRO SWITCH™ V7 miniature switches are designed for long term-reliability in a rugged switch packaged with a thermoplastic housing. These switches may be installed in a wide range of applications from simple or precision on/off limits, presence/absence sensing, or embedded in pressure or temperature assemblies.

The V7 switch is available as a pin plunger style or with optional integral or auxiliary levers to actuate the switch and offer versatility in the application. The switch requires as little as 0,15 Newtons [approximately ½ ounce] to operate for extremely sensitive applications or an operating force of almost 4 Newtons [14 ounces] where higher forces are required. The V7 switch can reliably control logic level electrical loads from less than 0.1 A to power duty switching up to 25 A. Agency certifications for the MICRO SWITCH™ V7 switches are provided through CSA, ENEC, and UL for global use around the world.

What makes our switches better?

- Certified with CSA, ENEC, and UL for global acceptability
- Reliable snap-spring mechanism with more than 60 years of proven service
- Available with pin plungers, integral levers (fitted two positions), or auxiliary levers to meet equipment requirements
- Electrical ratings from 0.1 A up to 25 A for design flexibility in one package size



Big performance in a small package.

COST OPTIMIZATION • RELIABILITY
PERFORMANCE • GLOBAL ACCEPTANCE

Features and Benefits

ACTUATION ON TIME

MICRO SWITCH™ V7 Series basic switches **operate with forces as low as 15 g** and carry options to increase to 397 g, and can thereby easily accommodate different actuator mechanisms.

Global acceptance: UL, CSA, ENEC

RELIABLE PERFORMANCE IN HARSH CONDITIONS

Switches feature **industry-leading temperature ranges** of -40 °C to 175 °C [-40 °F to 347 °F] to allow for years of reliable performance in harsh conditions.

LONG LIFE CYCLE RATING

The long life cycle rating (up to **10,000,000 cycles**) reduces the need to replace switches over the life of OEM platform applications, therefore reducing total system cost.

DESIGN FLEXIBILITY

Available with pin plungers, integral levers (fitted 2 positions), and auxiliary levers to meet a variety of equipment requirements, MICRO SWITCH™ V7 Series switches also boast electrical ratings from 0.1 A up to 25 A for design flexibility in one package size.

Potential Applications



VENDING MACHINE MOTORS

Switch controls motors or solenoids in vending machines for dispensing of product.

MICROWAVE DOOR INTERLOCK

Switch in door interlock of microwave that disconnects power if door opened.

OVEN CLEANING LATCH

Switch in door latch for oven clean operation.



PRESSURE SWITCH ASSEMBLY

Pressure switch senses incoming water pressure for power washer.

V7 Series

PRODUCT NOMENCLATURE

| Switch Type ¹ | Operating Force | Electrical Rating ^{3,6} | | Circuitry Code | Mounting/Construction ^{4,6} | Termination Style (Inches) | Lever Style ² | Special Designator |
|--------------------------|--------------------------------------|----------------------------------|---------------|----------------|--|--|---|---|
| V7 Series Miniature | | North America | Europe (ENEC) | | | | | |
| 1 | 150 g max. | A 5 A @ 125 Vac | 3 A | 1 SPDT | 3 150 °C 2,9 mm [0,11 in] mtg. holes | D8 0,187 x 0,02 quick connect | 002 Straight 22,1 mm [0,87 in] | Use only if this switch has a special feature. Could be any number. |
| 1 | 175 g max. (V & J electrical rating) | B 11 A @ 125 Vac | 10 A | 2 SPNO | 4 150 °C 3,1 mm [0,12 in] mtg. holes | E8 0,187 x 0,02 quick connect spread | 022 Straight 35,6 mm [1,4 in] | |
| 1 | 225 g max. (K & Z electrical rating) | C 15 A @ 125 Vac | — | 3 SPNC | 7 85 °C 2,9 mm [0,11 in] mtg. holes | D9 0,250 x 0,032 quick connect | 201 Roller 20,6 mm [0,81 in] | |
| 2 | 75 g max. | D 1 A @ 125 Vac | 1 A | | 8 85 °C 3,1 mm [0,12 in] mtg. holes | E9 0,250 x 0,032 quick connect spread | 207 Roller 34,0 mm [1,34 in] | |
| 3 | 50 g max. | E 10 A @ 125 Vac | 5 A | | 9 85 °C 2,9 mm [0,11 in] mtg. holes | P02 Left angle PCB | 263 Sim. roller 32,8 mm [1,29 in] | |
| 4 | 25 g max. | F 3 A @ 125 Vac | — | | 0 85 °C 3,1 mm [0,12 in] mtg. holes | P07 SPNO on edge PCB | 266 Tall sim. roller 34,0 mm [1,34 in] | |
| 5 | 15 g max. | H No rating | — | | A 177 °C with 2,9 mm [0,11 in] mtg. holes | Formed quick-connect terminals available | 048 Straight 59,4 mm [2,34 in] | |
| 6 | 6 oz to 14 oz max. | K 22 A @ 125 Vac | 20 A | | | | 636 Paddle 139,5 mm [5,5 in] | |
| 7 | 8 oz max. | S 0,1 A @ 125 Vac | 1 A | | | | Formed levers available | |
| 8 | 85 g max. | V 21 A @ 125 Vac | 16 A | | | | | |
| 9 | 300 g max. | W 15,1 A @ 125 Vac | — | | | | | |
| | | X 6 A @ 125 Vac | — | | | | | |
| | | Z 25 A @ 125 Vac | 20 A | | | | | |

ONLY

Not all combinations of model code are available. Please contact your Honeywell provider/representative for assistance.

NOTES:

- ¹ Not all possible combinations are available, these are only guidelines
- ² Lever length measured from center of back mounting hole to end of straight lever or center of roller
- ³ All ratings are UL/CSA, and where noted are also European-rated ENEC
- ⁴ Consider the temperature required and the mounting hole size when making this selection
- ⁵ Electric ratings "W" x "X" only used with "A" Mounting Construction and vice versa
- ⁶ European ENEC rating requires Mounting Construction code "9" or "0"

MICRO SWITCH™ Premium Miniature Basic Switches

Table 1. Specifications

| Characteristic | Parameter |
|-----------------------|---|
| Circuitry | SPDT, SPNC, SPNO |
| Operating force | 0,25 N to 3,9 N [15 g to 397 g] |
| Termination | quick connect; 4,75 mm x 0,51 mm [0.187 in x 0.02 in] quick connect: 6,35 mm x 0,81 mm [0.25 in x 0.032 in] PCB (printed circuit board) |
| Actuators | pin plunger, integral lever options, auxiliary lever options |
| Agency certification | CSA, ENEC, UL; RoHS compliant |
| Operating temperature | -40 °C to 85 °C [-40 °F to 185 °F], options for 175 °C [347 °F] |
| Mechanical life | up to 10 million cycles |
| Contact material | silver, gold plated, gold alloy |
| Housing material | high strength thermoplastic |

Table 2. Electrical Ratings

| Rating code | UL, CSA | ENEC ³ |
|-------------|---|----------------------------------|
| A | 5 A 125 Vac, 250 Vac, 277 Vac 1/10 HP 250 Vac | 3 (1) A, 250 Vac ² |
| B | 11 A 1/3 HP 125 Vac, 250 Vac or 277 Vac 1/2 A 125 Vdc; 1/4 A 250 Vdc 4 A 125 Vac "L" ¹ | 10 (3) A, 250 Vac ² |
| C | 15.1 A 1/2 HP 125 Vac, 250 Vac or 277 Vac 1/2 A 125 Vdc 1/4 A 250 Vdc; 5 A 125 Vac "L" ¹ | – |
| E | 10 A 1/3 HP 125 Vac, 250 Vac or 277 Vac 1/2 A 125 Vdc 1/4 A 250 Vdc, 4 A 125 Vac "L" ¹ | 5 (2) A, 250 Vac ² |
| F | 3 A 125 Vac, 250 Vac, 277 Vac 1/10 HP 250 Vac | – |
| S | 0.1 A, 125 Vac | 1 (0.05) A, 250 Vac ² |
| V | 21 A 1 HP 125 Vac, 250 Vac, 277 Vac 2 HP 250 Vac, 277 Vac | 16 (4) A, 250 Vac ² |
| W | 15.1 A 125 Vac, 250 Vac, 277 Vac | – |
| Z | 25 A, 277 Vac 1 HP, 125 Vac; 2 HP, 250 Vac | 20 (5) A, 250 Vac ² |

¹ Incandescent lamp rating

² XX(Y) - XX = max. rated resistive value in amps, and (Y) = max. rated inductive value in amps

³ European ENEC rating requires Mounting Construction code "9" or "0". See page four, Mounting Construction column

V7 Series

PRODUCT SPECIFICATIONS AND LISTINGS

Contact your Honeywell rep or distributor for additional listings

O.F. • Operating force
 R.F. • Release force
 P.T. • Pretravel
 O.T. • Overtravel
 D.T. • Differential travel
 O.P. • Operating position

| | Catalog Listing | Elect. Rating UL/CSA (CE) | Elect. Rating Spec. (page 4) | Contacts | O.F. max. newtons [grams] | O.P. nominal mm [inches] | P.T. max. mm [inches] | O.T. min. mm [inches] | D.T. mm [inches] |
|--|-----------------------|---------------------------|------------------------------|----------|---------------------------|--------------------------|-----------------------|-----------------------|---------------------------|
| | V7-2S17DB | 0.1 A (---) | S | SPDT | 0,79 [75] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1S17D8 | 0.1 A (---) | S | SPDT | 1,47 [150] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-5F17D8 | 3 A (---) | F | SPDT | 0,15 [15] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-4A17D8 | 5 A (---) | A | SPDT | 0,25 [25] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-3E17D8 | 10 A (---) | E | SPDT | 0,49 [50] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1B37D8 | 11 A (---) | B | SPNC | 1,47 [150] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-2B17D8 | 11 A (---) | B | SPDT | 0,74 [75] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-2B17E9 | 11 A (---) | B | SPDT | 0,74 [75] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| Pin plunger | V7-7B17D8 | 11 A (---) | B | SPDT | 2,22 [227] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
|  | V7-1C17D8 | 15 A (---) | C | SPDT | 1,47 [150] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1C17E9 | 15 A (---) | C | SPDT | 1,47 [150] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1C37B8 | 15 A (---) | C | SPNC | 1,47 [150] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1V19E9 | 21 A (16 A) | V | SPDT | 1,72 [175] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1V29E9 | 21 A (16 A) | V | SPNO | 1,72 [175] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1V39E9 | 21 A (16 A) | V | SPNC | 1,72 [175] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1Z19E9 | 25 A (20 A) | Z | SPDT | 2,21 [225] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1Z29E9 | 25 A (20 A) | Z | SPNO | 2,21 [225] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| | V7-1Z20E9* | 25 A (20 A) | Z | SPNO | 2,21 [225] | 14,7 [0.578] | 1,19 [0.047] | 1,27 [0.050] | 0,05 - 0,25 [0.002-0.010] |
| Lever 22,1 mm [0.87 in] | V7-1C17D8-002 | 15 A (---) | C | SPDT | 1,57 [160] | 15,2 [0.600] | 1,52 [0.060] | 0,89 [0.035] | 0,36 [0.015] max. |
|  | V7-1C17E9-002 | 15 A (---) | C | SPDT | 1,57 [160] | 15,2 [0.600] | 1,52 [0.060] | 0,89 [0.035] | 0,36 [0.015] max. |
| | V7-6C18D8-002* | 15 A (---) | C | SPDT | 4,05 [413] | 15,2 [0.600] | 1,52 [0.060] | 0,89 [0.035] | 0,36 [0.015] max. |

*3,1 mm mtg holes

MICRO SWITCH™ Premium Miniature Basic Switches

- O.F. • Operating force
- R.F. • Release force
- P.T. • Pretravel
- O.T. • Overtravel
- D.T. • Differential travel
- O.P. • Operating position

PRODUCT SPECIFICATIONS AND LISTINGS

Contact your Honeywell rep or distributor for additional listings

| | Catalog Listing | Elect. Rating UL/CSA (CE) | Elect. Rating Spec. (page 4) | Contacts | O.F. max. newtons [grams] | O.P. nominal mm [inches] | P.T. max. mm [inches] | O.T. min. mm [inches] | D.T. mm [inches] |
|---|-----------------|---------------------------|------------------------------|----------|---------------------------|--------------------------|-----------------------|-----------------------|-------------------|
| Lever 35,6 mm [1.40 in]  | V7-1S17D8-022 | 0.1 A (---) | S | SPDT | 0,83 [85] | 15,2 [0.60] | 3,04 [0.120] | 2,16 [0.085] | 0,76 [0.030] max. |
| | V7-3S17D8-022 | 0.1 A (---) | S | SPDT | 0,29 [30] | 15,2 [0.60] | 3,04 [0.120] | 2,16 [0.085] | 0,76 [0.030] max. |
| | V7-3S17E9-022 | 0.1 A (---) | S | SPDT | 0,29 [30] | 15,2 [0.60] | 3,04 [0.120] | 2,16 [0.085] | 0,76 [0.030] max. |
| | V7-1B17D8-022 | 11 A (---) | B | SPDT | 0,80 [82] | 15,3 [0.603] | 3,04 [0.120] | 1,70 [0.067] | 0,69 [0.027] max. |
| | V7-1B19D8-022 | 11 A (10 A) | B | SPDT | 0,80 [82] | 15,3 [0.603] | 3,25 [0.128] | 1,78 [0.070] | 0,71 [0.028] max. |
| | V7-2B17D8-022 | 11 A (---) | B | SPDT | 0,40 [41] | 15,3 [0.603] | 3,04 [0.120] | 1,70 [0.067] | 0,71 [0.027] max. |
| | V7-6B19E9-022 | 11 A (10 A) | B | SPDT | 2,11 [215] | 15,2 [0.60] | 3,25 [0.128] | 1,35 [0.053] | 0,76 [0.030] max. |
| Lever 59,4 mm [2.34 in]  | V7-3S17D8-048 | 0.1 A (---) | S | SPDT | 0,16 [16] | 15,3 [0.603] | 5,97 [0.235] | 3,00 [0.118] | 1,27 [0.050] max. |
| | V7-2B17D8-048 | 11 A (---) | B | SPDT | 0,20 [20] | 15,3 [0.603] | 5,97 [0.235] | 2,92 [0.115] | 1,27 [0.050] max. |
| | V7-1C17D8-048 | 15 A (---) | C | SPDT | 0,44 [45] | 15,2 [0.603] | 5,94 [0.234] | 4,19 [0.165] | 1,52 [0.060] max. |
| | V7-1V19E9-048 | 21 A (16 A) | V | SPDT | 0,54 [55] | 15,4 [0.605] | 6,35 [0.250] | 3,05 [0.120] | 1,40 [0.055] max. |
| | V7-9W1AE9-048** | 15 A (---) | W | SPDT | 0,88 [90] | 15,2 [0.603] | 6,35 [0.250] | 3,15 [0.124] | 1,37 [0.054] max. |
| Lever Sim. Roll 32,8 mm [1.29 in]  | V7-1S17D8-263 | 0.1 A (---) | S | SPDT | 0,88 [90] | 18,54 [0.730] | 2,79 [0.110] | 1,90 [0.075] | 0,76 [0.030] max. |
| | V7-3E19E9-263 | 10 A (5 A) | E | SPDT | 0,32 [33] | 18,54 [0.730] | 2,54 [0.100] | 1,90 [0.075] | 0,76 [0.030] max. |
| | V7-1B17D8-263 | 11 A (---) | B | SPDT | 0,88 [90] | 18,54 [0.730] | 2,79 [0.110] | 1,52 [0.060] | 0,76 [0.030] max. |
| | V7-1C17D8-263 | 15 A (---) | C | SPDT | 0,89 [91] | 18,54 [0.730] | 2,79 [0.110] | 1,55 [0.061] | 0,61 [0.024] max. |
| | V7-1V29E9-263 | 21 A (16 A) | V | SPNO | 1,08 [110] | 18,49 [0.728] | 2,90 [0.114] | 1,62 [0.064] | 0,64 [0.025] max. |
| | V7-1Z10E9-263* | 25 A (20 A) | Z | SPDT | 1,33 [136] | 18,49 [0.728] | 2,90 [0.114] | 1,62 [0.064] | 0,64 [0.025] max. |
| Lever, Roller 20,57 mm [0.81 in]  | V7-2S17D8-201 | 0.1 A (---) | S | SPDT | 0,88 [90] | 20,57 [0.810] | 1,19 [0.047] | 1,02 [0.040] | 0,38 [0.015] max. |
| | V7-6B19E9-201 | 11 A (10 A) | B | SPDT | 4,50 [459] | 20,52 [0.808] | 1,42 [0.056] | 0,86 [0.034] | 0,33 [0.013] max. |
| | V7-7B17D8-201 | 11 A (---) | B | SPDT | 2,78 [283] | 20,52 [0.808] | 1,42 [0.056] | 0,86 [0.034] | 0,33 [0.013] max. |
| | V7-1C17D8-201 | 15 A (---) | C | SPDT | 1,72 [175] | 20,57 [0.810] | 1,19 [0.047] | 0,81 [0.032] | 0,30 [0.012] max. |
| Lever, Roller 34,04 mm [1.34 in]  | V7-1S17D8-207 | 0.1 A (---) | S | SPDT | 0,83 [85] | 20,57 [0.810] | 2,84 [0.112] | 2,03 [0.080] | 0,76 [0.030] max. |
| | V7-2A17D8-207 | 5 A (---) | A | SPDT | 0,42 [43] | 20,57 [0.810] | 2,92 [0.115] | 1,52 [0.060] | 0,64 [0.025] max. |
| | V7-1B17D8-207 | 11 A (---) | B | SPDT | 0,83 [85] | 20,57 [0.810] | 2,92 [0.115] | 1,52 [0.060] | 0,76 [0.030] max. |
| | V7-1C17D8-207 | 15 A (---) | C | SPDT | 0,88 [90] | 20,57 [0.810] | 2,92 [0.115] | 1,52 [0.060] | 0,64 [0.025] max. |
| | V7-1V19E9-207 | 21 A (16 A) | V | SPDT | 0,98 [100] | 20,52 [0.808] | 3,07 [0.121] | 1,65 [0.065] | 0,76 [0.030] max. |


*3,1 mm mtg holes

** 177 °C [350 °F]


V7 Series

AVAILABLE TERMINALS


Quick Connect (QC)



D8 Terminals: 0.187 in wide x 0.020 in thick.




E8 Terminals: 0.187 in wide x 0.020 in thick.



E9 Terminals: 0.250 in wide x 0.032 in thick.

Printed Circuit Board (PO2)

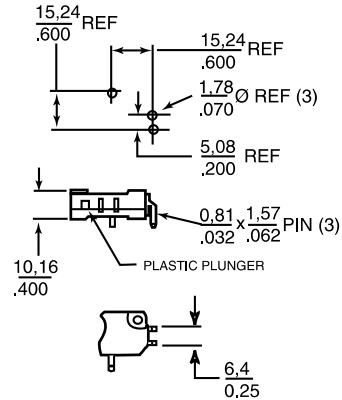

These terminals interface with snap-on receptacles and other components from AMPMODU interconnection system.

STANDARD ACTUATOR OPTIONS

| | | |
|--|----------------------------------|--|
| | Straight Lever (-002) | Roller Lever (-201) |
| | Straight Lever (-022) | Roller Lever (-207) |
| | Straight Lever (-048) | Simulated Roller Lever (-263) |

ACCESSORIES

| | Part Number | Description |
|--|-------------|---|
| | 15PA177-V7 | Insulator packet: 500 pieces of 0,46 mm [0.018 in] thick varnished fiberglass |
| | 15PA260 | Plunger boot seal: Elastomer, dust and splash resistant (Switch not included) |

MICRO SWITCH™ Premium Miniature Basic Switches

This Honeywell datasheet supports the following MICRO SWITCH™ V7 Series Basic Switch Listings

| | | | |
|-----------------|---------------|---------------|-----------------|
| V7-1C17D8-002 | V7-1D10E9-201 | V7-2B17E9 | V7-6B19D8-057 |
| V7-1C37D855-002 | V7-1V17D8-201 | V7-6C17D8 | V7-2B17D8-162 |
| V7-6C18D8-002 | V7-1C17D8-207 | V7-4S17D8 | V7-4A29E8-424 |
| V7-1C27D855-002 | V7-1B17D8-207 | V7-1Y19E9 | V7-1C17D844 |
| V7-1C33D855-002 | V7-2B17D8-207 | V7-1C27E9 | V7-1B17D8-122 |
| V7-1C39D8-002 | V7-1C17E9-207 | V71Z10E9 | V7-1C17D844-429 |
| V7-1C17E9-002 | V7-2A17D8-207 | V7-1B17D8 | V7-7A19D8-374 |
| V7-6C28E9-002 | V7-1V19E9-207 | V7-6B19D8 | V7-4A17D8-407 |
| V7-1B17D8-022 | V7-1B10E9-207 | V7-1C18D8 | V7-5F17D8-289 |
| V7-1B19D8-022 | V7-1A27D8-207 | V7-1A17D8 | V7-6C17D8-057 |
| V7-1C17D8-022 | V7-7D17D8-207 | V7-2B29D8 | V7-2B29D8-384 |
| V7-3S17E9-022 | V7-2S17D8-207 | V7-5D17E9 | V7-1X1AD8-304 |
| V7-6B19E9-022 | V7-1S17D8-207 | V7-3A17D8 | V7-6C17D8-162 |
| V7-1S17D8-022 | V7-1C17D8-263 | V7-4S37D8 | V7-1A23E9-172 |
| V7-2B17D8-022 | V7-1B17D8-263 | V7-7B19E9 | V7-1X2AD9C2 |
| V7-3S17D8-022 | V7-6C17D8-263 | V7-1Z10E9 | V7-1C27E9-292 |
| V7-1B29P07-022 | V7-1Z10E9-263 | V7-2A17E9 | V7-2S17E9-420 |
| V7-1C18E9-022 | V7-1S17D8-263 | V7-5F27D8 | V7-1C17D8-294 |
| V7-3E17E9-022 | V7-1C27E9-263 | V7-3S17E9 | V7-7B17D8-073 |
| V7-2B27D8-022 | V7-1V29E9-263 | V7-1S10D8 | V7-3S17D8-148 |
| V7-2S17D8-022 | V7-3E19E9-263 | V7-1Z39E9 | V7-7C19D8-640 |
| V7-9W1AE9-022 | V71Z10E9-263 | V7-2B27E9 | V7-1V19E994-403 |
| V7-1Z19E9-022 | V7-7B19D8-263 | V7-3E19E9 | V7-1A17D8-057 |
| V7-2B17D8-048 | V7-1S18D8-263 | V7-1A17P02 | V7-1E17D8-366 |
| V7-1V19E9-048 | V7-1B37D8-263 | V7-4S27D8 | V7-5F17D8-336 |
| V7-1C17D8-048 | V7-3A17D8-263 | V7-7B27D8 | V7-1C17E9-292 |
| V7-1X2AD8-048 | V7-1B178-263 | V7-1Z13E9 | V7-6A17D8-057 |
| V7-9W1AE9-048 | V7-1A27D8-636 | V7-1Z30E9 | V7-2E17E9-420 |
| V7-1B17D8-048 | V7-1C17D8 | V7-2A27D8 | V7-6C17D8-439 |
| V7-3S17D8-048 | V7-2B17D8 | V7-7A19D8 | V7-1X1AD9C1 |
| V7-9W2AE9-048 | V7-1V39E9 | V7-2B37E9 | V7-7B10D8-274 |
| V7-7B17D8-048 | V7-1Z19E9 | V7-1C29D8 | V7-7B19D8-426 |
| V7-1A17D8-048 | V7-1B37D8 | V7-1C13E9 | V7-3E17D8-148 |
| V7-2B29E9-048 | V7-2S17D8 | V7-3A18D8 | V7-1A28D882 |
| V7-2B19E9-048 | V7-1C17E9 | V7-9W2AE9 | V7-7B29D883 |
| V7-6C18D8-048 | V7-1C37D8 | V7-4A18E9 | V7-7B17D8-481 |
| V7-1B27D8-048 | V7-1Z29E9 | V7-9W1AE9 | V7-2E17E9-366 |
| V71A17D8048 | V7-3E17D8 | V7-1A28D8 | V7-1C29E7 |
| V7-1C17D8-201 | V7-5F17D8 | V7-1B19E9 | V7-1S19D8-369 |
| V7-7B17D8-201 | V7-7B17D8 | V7-1K29E9 | V7-7B19D8-640 |
| V7-1C13D8-201 | V7-1S17D8 | V7-2B17-D8 | V7-7B17D8-140 |
| V7-2B17D8-201 | V7-1V19E9 | V7-3E10E8 | V7-1X2AE9-292 |
| V7-1C17E9-201 | V7-3E17E9 | V7-6C37E9-036 | V7-1Z13E987 |
| V7-2S17D8-201 | V7-1Z20E9 | V7-1C27D94 | V7-1X2AD8-294 |
| V7-6B19E9-201 | V7-4A17D8 | V7-1C17D8-295 | V7-6B19D8-672 |
| V7-1S17D8-201 | V7-5F27E9 | V7-1C29D7 | V7-7B29E9-053 |
| V7-7B17D862-201 | V7-1Y39E9 | V7-1Z13E993 | V7-1V20E94 |
| V7-1D19D8-201 | V7-1V29E9 | V7-1V19E9-269 | V7-1B19D8-369 |
| V7-3A17D8-201 | V7-1D10D8 | V7-6C13D8-132 | 15PA177-V7 |
| | | | 15PA260 |

V7 Series

ADDITIONAL INFORMATION

The following associated literature is available on the Honeywell web site at sensing.honeywell.com:

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
 - Application note: Electronic sensors and electromechanical switches in valves and flow meters
 - Application note: Electronic sensors and MICRO SWITCH™ switches in industrial air compressors
 - Application note: Sensors and switches for HVAC/R applications
 - Application note: Sensors and switches in oil rig applications
 - Application note: Sensors and switches in sanitary valves
 - Application note: Sensors and switches for valve monitors and valve indicators
 - Application note: Treadmill equipment
 - Application note: V7 available terminals
 - Technical bulletin: Applying precision switches
 - Technical bulletin: Low energy switch guide

WARNING **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.